


Chapter 2

Application Layer

Lecture 4

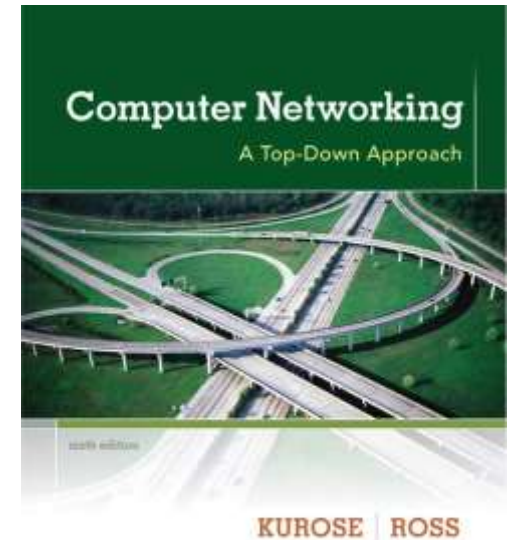

*Computer
Networking: A Top
Down Approach*
6th edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012

©

2021 __ 2020

Chapter 2: outline

2.1 principles of network applications

2.2 Web and HTTP

2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS

Chapter 2: application layer

our goals:

- ❖ conceptual, implementation aspects of network application protocols
 - transport-layer service models
 - client-server paradigm
 - peer-to-peer paradigm
- ❖ learn about protocols by examining popular application-level protocols
 - HTTP
 - FTP
 - SMTP
 - DNS

Some network apps

- ❖ e-mail
- ❖ web
- ❖ text messaging
- ❖ remote login
- ❖ P2P file sharing
- ❖ multi-user network games
- ❖ streaming stored video (YouTube, Hulu, Netflix)
- ❖ voice over IP (e.g., Skype)
- ❖ real-time video conferencing
- ❖ social networking
- ❖ ...
- ❖ ...


Creating a network app

write programs that:

- ❖ run on (different) *end systems*
- ❖ communicate over network
- ❖ e.g., web server software communicates with browser software

no need to write software for
network-core devices

- ❖ network-core devices do not run user applications
- ❖ applications on end systems allows for rapid app development, propagation

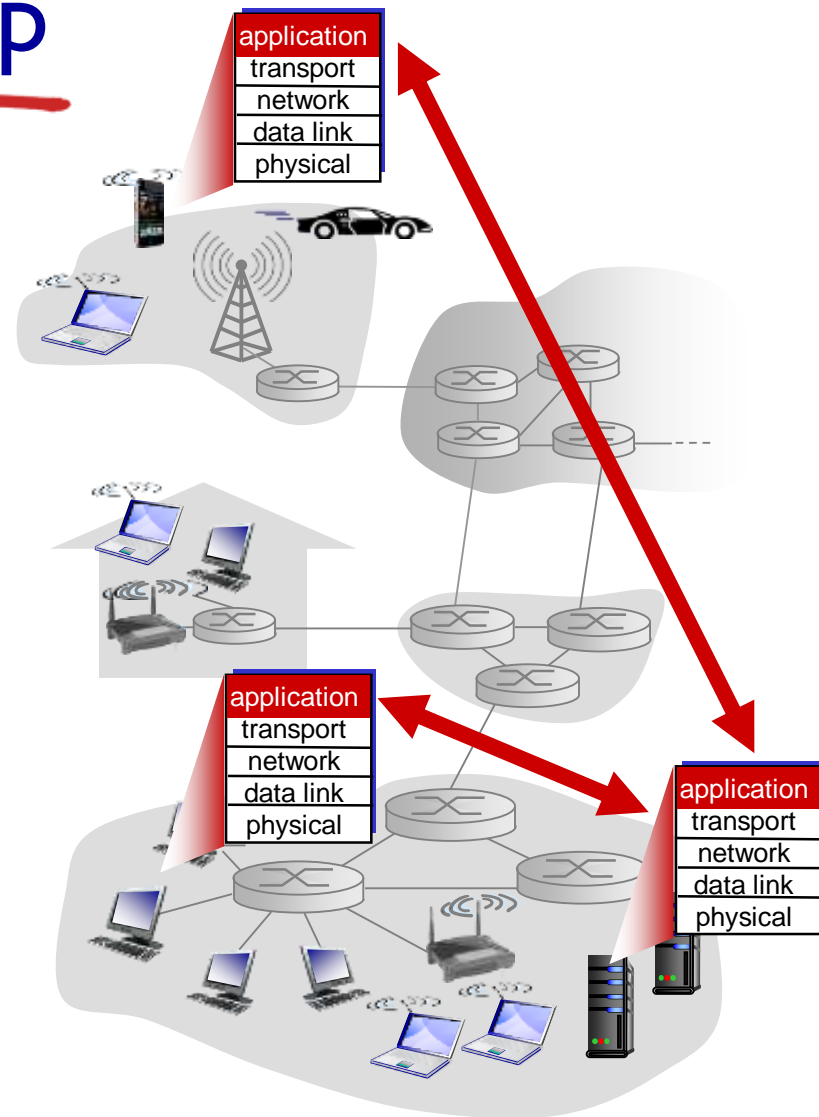


Application architectures

possible structure of applications:

- ❖ client-server
- ❖ peer-to-peer (P2P)

Client-server architecture

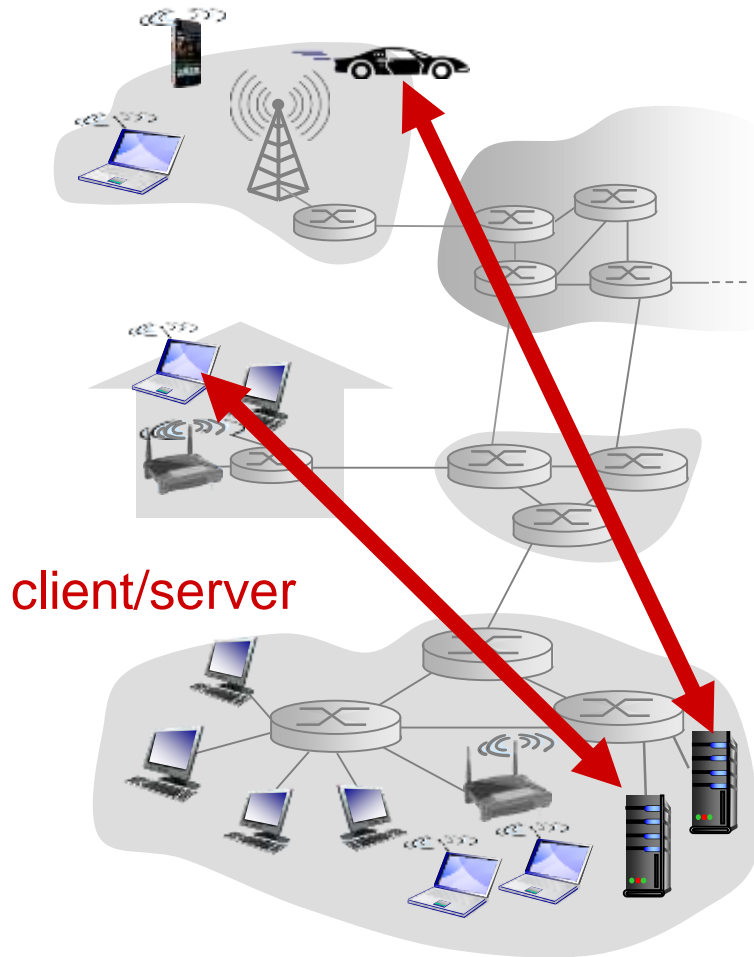

server:


- ❖ always-on host
- ❖ permanent IP address
- ❖ data centers for scaling

clients:

- ❖ communicate with server
- ❖ may be intermittently connected
- ❖ may have dynamic IP addresses
- ❖ do not communicate directly with each other

P2P architecture

- ❖ *no* always-on server
- ❖ arbitrary end systems directly communicate
- ❖ peers request service from other peers, provide service in return to other peers
 - *self scalability* – new peers bring new service capacity, as well as new service demands
- ❖ peers are intermittently connected and change IP addresses
 - complex management

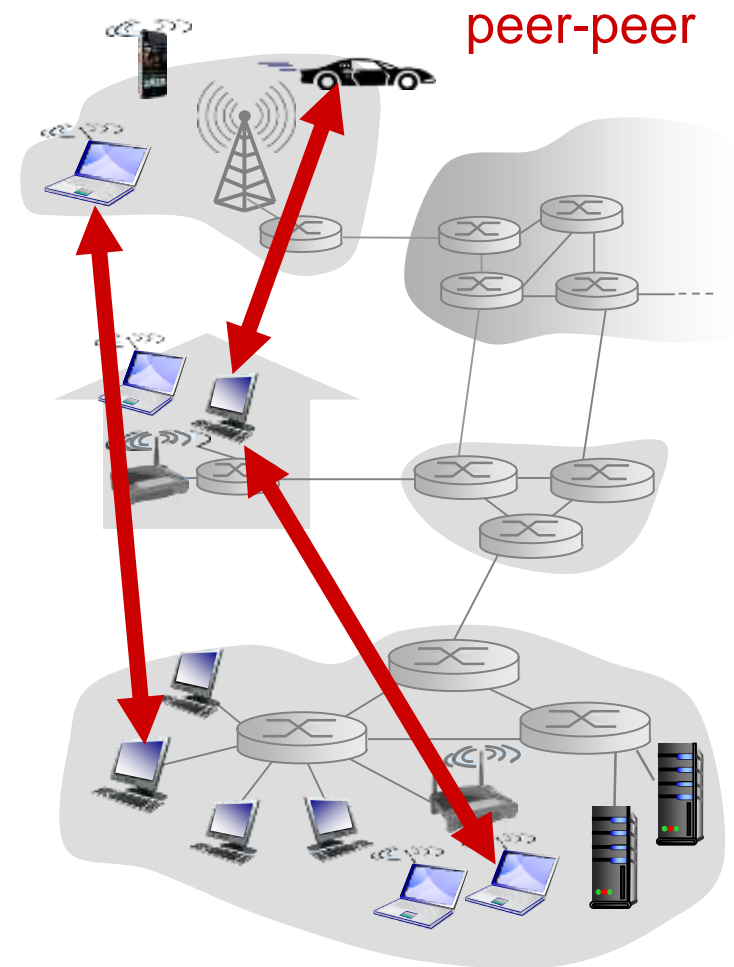

Processes communicating

process: program running within a host

- ❖ within same host, two processes communicate using **inter-process communication** (defined by OS)
- ❖ processes in different hosts communicate by exchanging **messages**

clients, servers


client process: process that initiates communication

server process: process that waits to be contacted

- ❖ aside: applications with P2P architectures have client processes & server processes

Sockets

- ❖ process sends/receives messages to/from its **socket**
- ❖ socket analogous to door
 - sending process shoves message out door
 - sending process relies on transport infrastructure on other side of door to deliver message to socket at receiving process

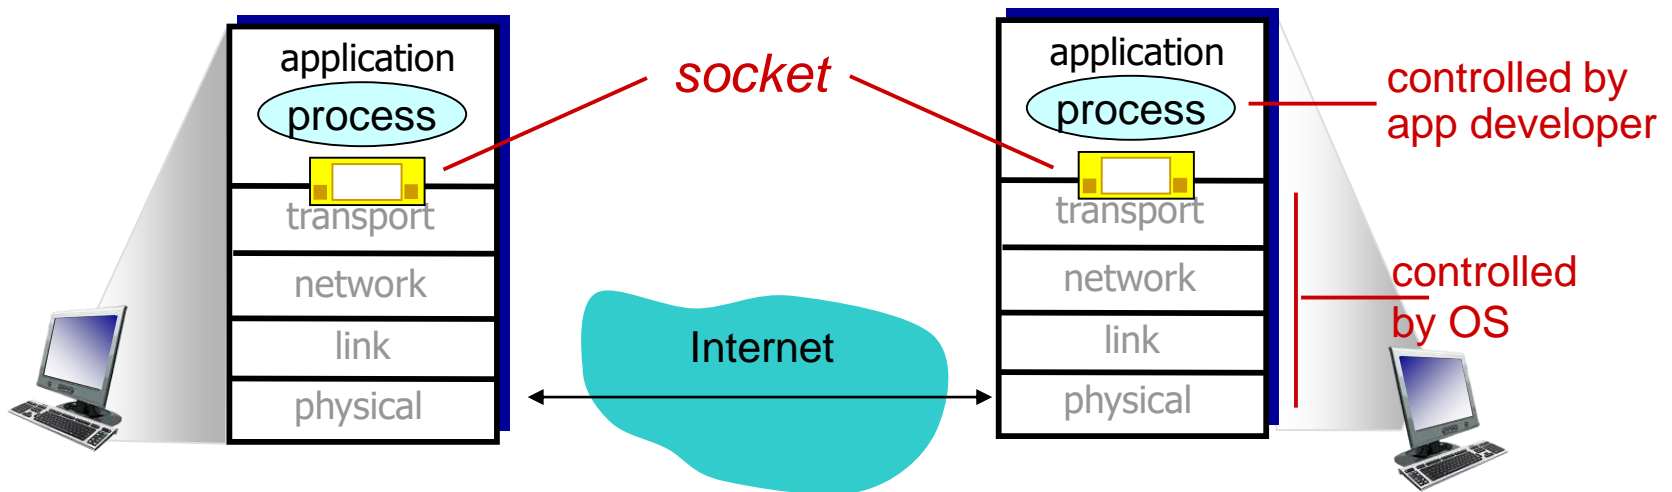

Addressing processes

- ❖ to receive messages, process must have *identifier*
- ❖ host device has unique 32-bit IP address
- ❖ Q: does IP address of host on which process runs suffice for identifying the process?
 - A: no, *many* processes can be running on same host
- ❖ *identifier* includes both **IP address** and **port numbers** associated with process on host.
- ❖ example port numbers:
 - HTTP server: 80
 - mail server: 25
- ❖ to send HTTP message to gaia.cs.umass.edu web server:
 - **IP address**: 128.119.245.12
 - **port number**: 80
- ❖ more shortly...

App-layer protocol defines

- ❖ **types of messages exchanged,**
 - e.g., request, response
- ❖ **message syntax:**
 - what fields in messages & how fields are delineated
- ❖ **message semantics**
 - meaning of information in fields
- ❖ **rules** for when and how processes send & respond to messages

open protocols:

- ❖ defined in RFCs
- ❖ allows for interoperability
- ❖ e.g., HTTP, SMTP

proprietary protocols:

- ❖ e.g., Skype

What transport service does an app need?

data integrity

- ❖ some apps (e.g., file transfer, web transactions) require 100% reliable data transfer
- ❖ other apps (e.g., audio) can tolerate some loss

timing

- ❖ some apps (e.g., Internet telephony, interactive games) require low delay to be “effective”

throughput

- ❖ some apps (e.g., multimedia) require minimum amount of throughput to be “effective”
- ❖ other apps (“elastic apps”) make use of whatever throughput they get

security

- ❖ encryption, data integrity,
...

Transport service requirements: common apps

application	data loss	throughput	time sensitive
file transfer	no loss	elastic	no
e-mail	no loss	elastic	no
Web documents	no loss	elastic	no
real-time audio/video	loss-tolerant	audio: 5kbps-1Mbps video: 10kbps-5Mbps	yes, 100' s msec
stored audio/video	loss-tolerant	same as above	
interactive games	loss-tolerant	few kbps up	yes, few secs
text messaging	no loss	elastic	yes, 100' s msec yes and no

Internet transport protocols services

TCP service:

- ❖ *reliable transport* between sending and receiving process
- ❖ *flow control*: sender won't overwhelm receiver
- ❖ *congestion control*: throttle sender when network overloaded
- ❖ *does not provide*: timing, minimum throughput guarantee, security
- ❖ *connection-oriented*: setup required between client and server processes

UDP service:

- ❖ *unreliable data transfer* between sending and receiving process
- ❖ *does not provide*: reliability, flow control, congestion control, timing, throughput guarantee, security, or connection setup,

Q: why bother? Why is there a UDP?

Internet apps: application, transport protocols

application	application layer protocol	underlying transport protocol
e-mail	SMTP [RFC 2821]	TCP
remote terminal access	Telnet [RFC 854]	TCP
Web	HTTP [RFC 2616]	TCP
file transfer	FTP [RFC 959]	TCP
streaming multimedia	HTTP (e.g., YouTube), RTP [RFC 1889]	TCP or UDP
Internet telephony	SIP, RTP, proprietary (e.g., Skype)	TCP or UDP

Securing TCP

TCP & UDP

- ❖ no encryption
- ❖ Clear text passwds sent into socket traverse Internet in clear text

SSL

- ❖ provides encrypted TCP connection
- ❖ data integrity
- ❖ end-point authentication

SSL is at app layer

- ❖ Apps use SSL libraries, which “talk” to TCP

SSL socket API

- ❖ Clear text passwds sent into socket traverse Internet encrypted
- ❖ See Chapter 7

Chapter 2: outline

2.1 principles of network applications

- app architectures
- app requirements

2.2 Web and HTTP

2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS

Web and HTTP

First, a review...

- ❖ *web page* consists of *objects*
- ❖ object can be HTML file, JPEG image, Java applet, audio file,...
- ❖ web page consists of *base HTML-file* which includes *several referenced objects*
- ❖ each object is addressable by a *URL*, e.g.,

`www.someschool.edu/someDept/pic.gif`


host name

path name

HTTP overview

HTTP: hypertext transfer protocol

- ❖ Web's application layer protocol
- ❖ client/server model
 - **client**: browser that requests, receives, (using HTTP protocol) and "displays" Web objects
 - **server**: Web server sends (using HTTP protocol) objects in response to requests

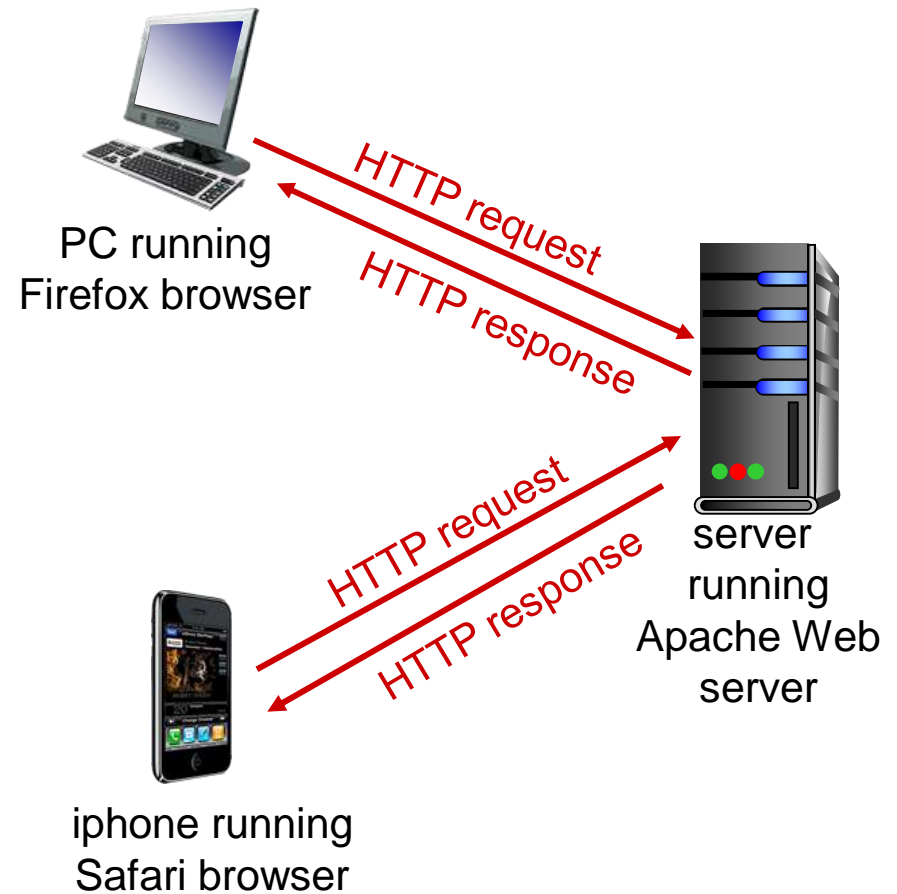

HTTP overview (continued)

uses TCP:

- ❖ client initiates TCP connection (creates socket) to server, port 80
- ❖ server accepts TCP connection from client
- ❖ HTTP messages (application-layer protocol messages) exchanged between browser (HTTP client) and Web server (HTTP server)
- ❖ TCP connection closed

HTTP is “stateless”

- ❖ server maintains no information about past client requests

aside
protocols that maintain “state” are complex!

- ❖ past history (state) must be maintained
- ❖ if server/client crashes, their views of “state” may be inconsistent, must be reconciled

HTTP connections

non-persistent HTTP

- ❖ at most one object sent over TCP connection
 - connection then closed
- ❖ downloading multiple objects required multiple connections

persistent HTTP

- ❖ multiple objects can be sent over single TCP connection between client, server

Chapter 2: outline

2.1 principles of network applications

- app architectures
- app requirements

2.2 Web and HTTP


2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS


FTP: the file transfer protocol

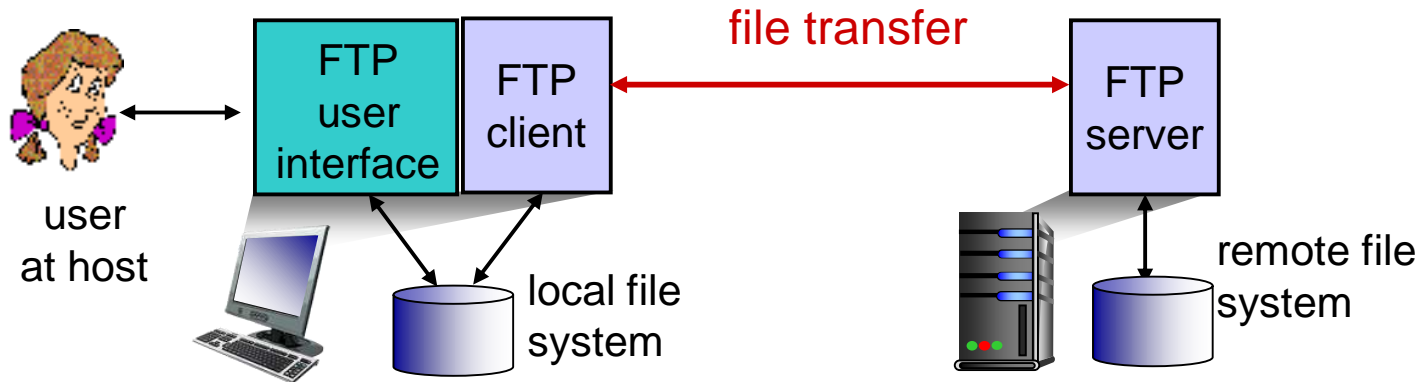

- ❖ transfer file to/from remote host
- ❖ client/server model
 - *client*: side that initiates transfer (either to/from remote)
 - *server*: remote host
- ❖ ftp: RFC 959
- ❖ ftp server: port 21

FTP: separate control, data connections

- ❖ FTP client contacts FTP server at port 21, using TCP
- ❖ client authorized over control connection
- ❖ client browses remote directory, sends commands over control connection
- ❖ when server receives file transfer command, *server* opens 2nd TCP data connection (for file) to client
- ❖ after transferring one file, server closes data connection

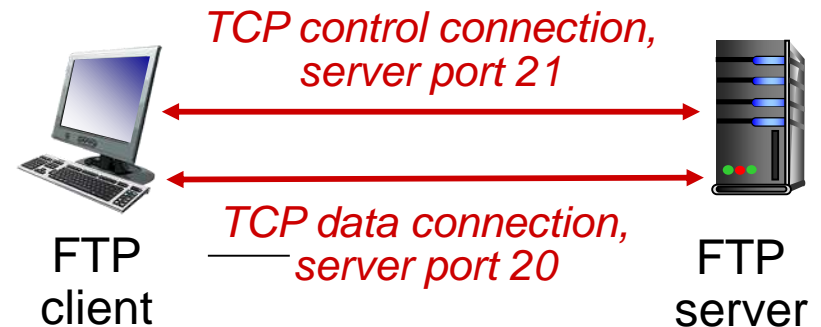

- ❖ server opens another TCP data connection to transfer another file
- ❖ control connection: “*out of band*”
- ❖ FTP server maintains “state”: current directory, earlier authentication

Chapter 2: outline

2.1 principles of network applications

- app architectures
- app requirements

2.2 Web and HTTP

2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS


Electronic mail

Three major components:

- ❖ user agents
- ❖ mail servers
- ❖ simple mail transfer protocol: SMTP

User Agent


- ❖ a.k.a. “mail reader”
- ❖ composing, editing, reading mail messages
- ❖ e.g., Outlook, Thunderbird, iPhone mail client
- ❖ outgoing, incoming messages stored on server

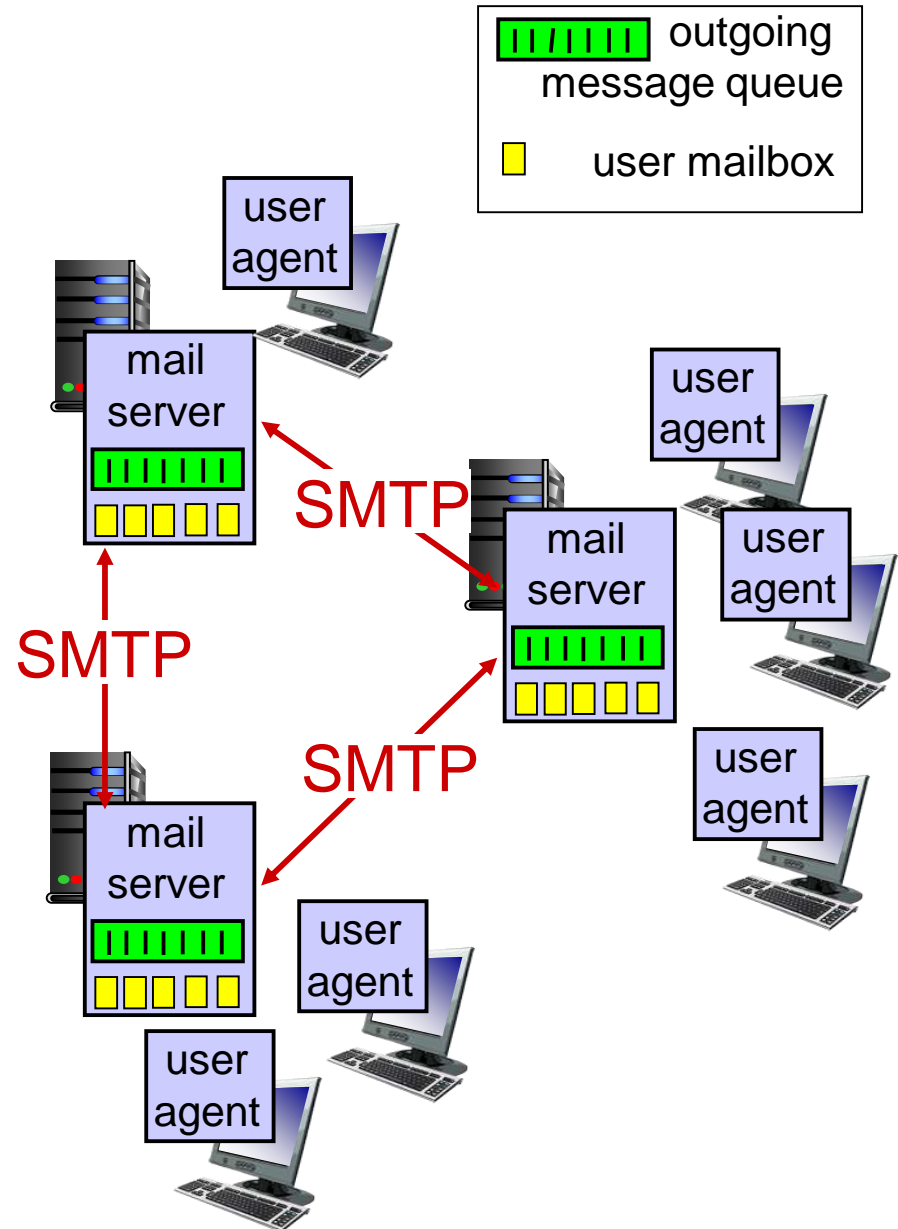

Electronic mail: mail servers

mail servers:

- ❖ *mailbox* contains incoming messages for user
- ❖ *message queue* of outgoing (to be sent) mail messages
- ❖ *SMTP protocol* between mail servers to send email messages
 - client: sending mail server
 - “server”: receiving mail server

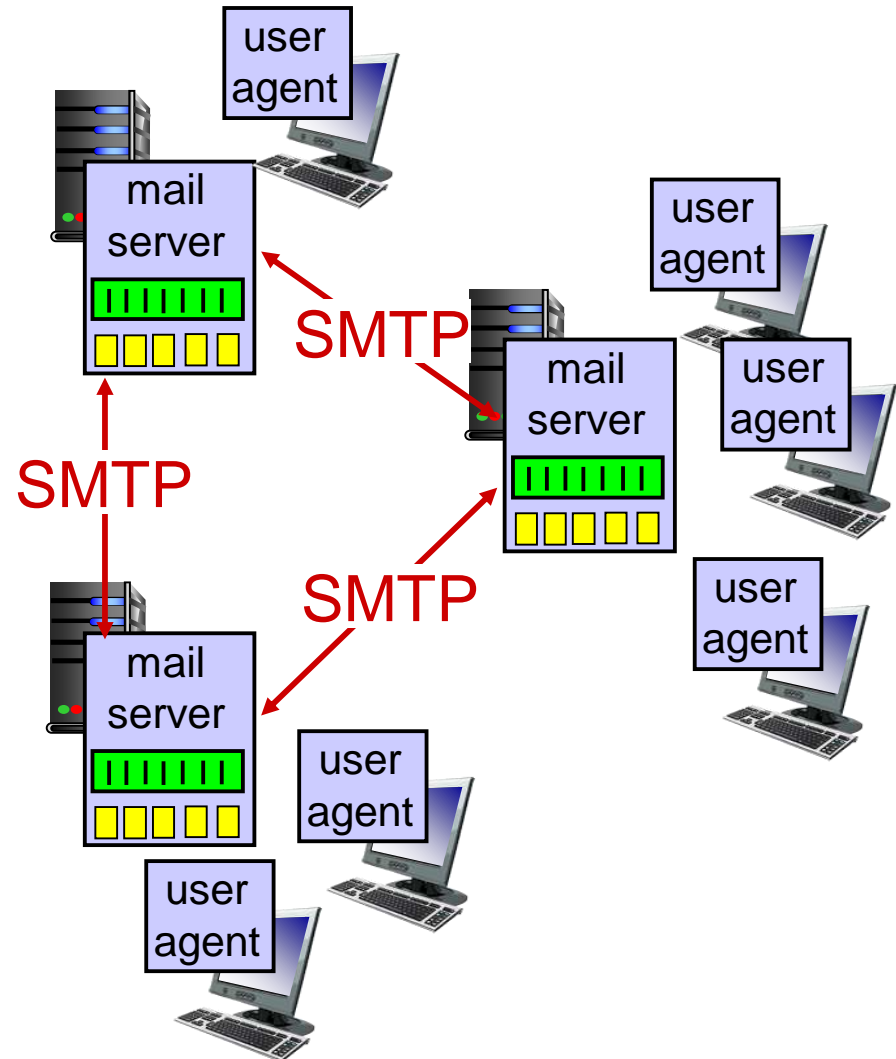


Electronic Mail: SMTP [RFC 2821]

- ❖ uses TCP to reliably transfer email message from client to server, port 25
- ❖ direct transfer: sending server to receiving server
- ❖ three phases of transfer
 - handshaking (greeting)
 - transfer of messages
 - closure
- ❖ command/response interaction (like HTTP, FTP)
 - **commands:** ASCII text
 - **response:** status code and phrase
- ❖ messages must be in 7-bit ASCII

Scenario: Alice sends message to Bob

- 1) Alice uses UA to compose message "to" bob@someschool.edu
- 2) Alice's UA sends message to her mail server; message placed in message queue
- 3) client side of SMTP opens TCP connection with Bob's mail server
- 4) SMTP client sends Alice's message over the TCP connection
- 5) Bob's mail server places the message in Bob's mailbox
- 6) Bob invokes his user agent to read message

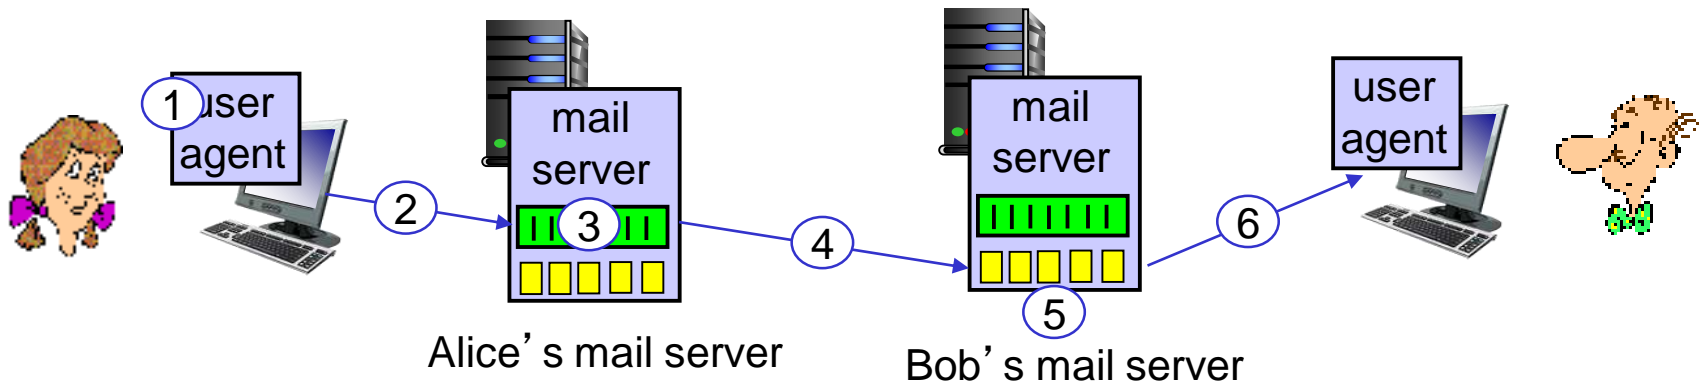

Chapter 2: outline

2.1 principles of network applications

- app architectures
- app requirements

2.2 Web and HTTP

2.3 FTP

2.4 electronic mail

- SMTP, POP3, IMAP

2.5 DNS

DNS: domain name system

people: many identifiers:

- SSN, name, passport #

Internet hosts, routers:

- IP address (32 bit) - used for addressing datagrams
- “name”, e.g., www.yahoo.com - used by humans

Q: how to map between IP address and name, and vice versa ?

Domain Name System:

- ❖ *distributed database* implemented in hierarchy of many *name servers*
- ❖ *application-layer protocol*: hosts, name servers communicate to *resolve* names (address/name translation)
 - note: core Internet function, implemented as application-layer protocol
 - complexity at network's “edge”

DNS: services, structure

DNS services

- ❖ hostname to IP address translation
- ❖ host aliasing
- ❖ mail server aliasing
- ❖ load distribution
 - replicated Web servers: many IP addresses correspond to one name

why not centralize DNS?

- ❖ single point of failure
- ❖ traffic volume
- ❖ distant centralized database
- ❖ maintenance

A: doesn't scale!